

JOTUN Sprøjtespartel Medium 6887

Product description

Type

Pre-mixed, light filler with excellent filling properties, designed for spray application.

Features and benefits

The filler is easy to work with so that a perfect result can be quickly achieved. It is very easy to sand down. The product is CE labeled and certified according to EN13963.

Recommended use

Can be used to fill plasterboard joints when paper tape is used as a reinforcement. For use indoors in dry rooms for the filling of walls and ceilings on substrates such as concrete, light concrete, plaster and plasterboard. The product can also be used for filling plasterboard where joint tape is used.

Product data

Packaging size	According to the current price list.
Colours	Light grey
Generic type	EVA polymer dispersion based filler with white spheric aluminium silicate, expanded perlite and dolomite.
Particle size	max 0.2 mm
pH value	8 to 9

Application data

Remarks

The filler is not water-resistant. Can be overcoated.

Application equipment / methods

Can be applied with conventional application equipment that can apply spray fillers.

Cleaning of painting tools

Should be cleaned with water while the filler is still wet.
Dried filler can be removed by soaking in water.

Thinner

Shall not be thinned.

Spreading rate and film thickness

Comments: 1 m²/litre for 1 mm thick layer.

Conditions during application

The temperature of the substrate shall be above +10°C upon application.

Cleaning of spillage

Filler on the skin can be removed using soap and water.

Drying times

Depending on film thickness, substrate type, temperature, humidity, ventilation.
Can be applied in thicknesses of up to 4 mm. Thicker layers significantly extend the drying time.
It can be advantageous to apply the filler in several layers, allowing it to dry through between each application.

The drying time is measured by stated values:

Relative Humidity (RH)	50 %
Air temperature	23 °C
Substrate temperature	23 °C

Recoatable, minimum	8-10 hours
----------------------------	------------

Directions for use

Surface preparation

Any remaining unevenness and concrete bumps should be removed.
Prior to filling, the surface must be cleaned to remove dust, sand and other impurities.
All substrates shall be firm, clean and free from dust and loose particles.

Filler

Can be applied with conventional application equipment that can apply spray fillers.
Can be levelled in a thickness of 0-4 mm. Depths of greater than 4 mm shall be filled in several layers, or filled using a suitable filler, which can fill depths from 0-10 mm. Thicker layers significantly extend the drying time.
It can be advantageous to apply the filler in several layers, allowing it to dry through between each application.
Smooth using fine sandpaper.

Storage

In storage and in transport keep the container frost free and upright.
Shelf life of min. 1 year in unopened packaging when stored in a cool, dry place.

Environmental labelling




The product is recognized by Miljømærkning Danmark, and conforms with the demands of the environmental label Svanen (the swan).

Approvals

CE-marking

A Declaration of Performance (DoP) for the product has been issued.

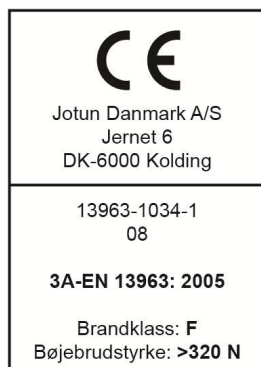

Health and safety

Please observe the environmental and precautionary notices displayed on the container.

A Material Safety Data Sheet for the product has been issued.

Detailed information regarding health and safety risks and precautions for the use of this product is specified in the product's Safety Data Sheet.

First-aid measures, refer to section 4.

Handling and storage, refer to section 7.

Transport information, refer to section 14.

Regulatory information, refer to section 15.

Product registration number: Not to be declared



Contact information

Jotun Danmark A/S
Jernet 6
6000 Kolding
Tlf.: +45 76 30 32 00
Mailadresse: mail@jotun.dk

Disclaimer

The information in this document is given to the best of Jotun's knowledge, based on laboratory testing and practical experience. Jotun's products are considered as semi-finished goods and as such, products are often used under conditions beyond Jotun's control. Jotun cannot guarantee anything but the quality of the product itself. Minor product variations may be implemented in order to comply with local requirements. Jotun reserves the right to change the given data without further notice.

Users should always consult Jotun for specific guidance on the general suitability of this product for their needs and specific application practices.

If there is any inconsistency between different language issues of this document, the English (Eng) version will prevail.

